

HYBRID STEPPER MOTOR

TYPE : 42HS40-0404A05-D24

Step Angle

1.8° ± 5%

Phase No

2

Insulation Resistance



100MΩ (500VDC)

Insulation Class

B

Specifications

Wiring Diagram

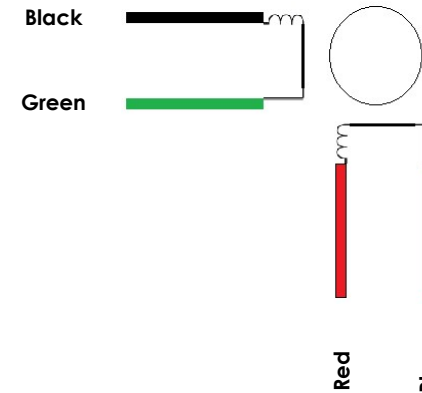

Connection Type

Parallel

Series

Unipolar

Holding Torque

0,35 Nm

Current

0,4 A

Resistance

25 ± 10% Ω

Inductance

45 ± 20% mH

Dimensions (mm)

