

HYBRID STEPPER MOTOR

TYPE : 86HS118-5608A127-B32

Step Angle

1.8° ± 5%

Phase No

4

Insulation Resistance





100MΩ (500VDC)

Insulation Class

B

Specifications

Wiring Diagram

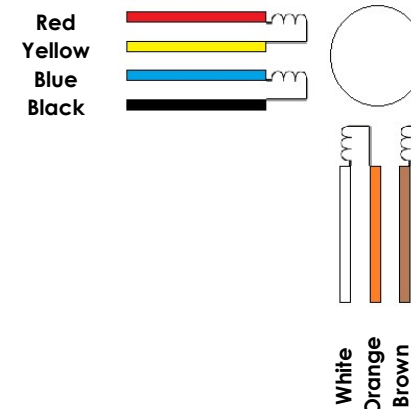

Connection Type

Parallel

Series

Unipolar

Holding Torque

8,5 Nm

8,5 Nm

6 Nm

Current

5,6 A

2,8 A

4,0 A

Resistance

0,6 ± 10% Ω

2,4 ± 10% Ω

1,2 ± 10% Ω

Inductance

6,0 ± 20% mH

24 ± 20% mH

6,0 ± 20% mH

Dimensions (mm)

