

HYBRID STEPPER MOTOR

TYPE : 86HS65-4008A9525-D32

Step Angle

$1.8^\circ \pm 5\%$

Phase No

4

Insulation Resistance





100M Ω (500VDC)

Insulation Class

B

Specifications

Wiring Diagram

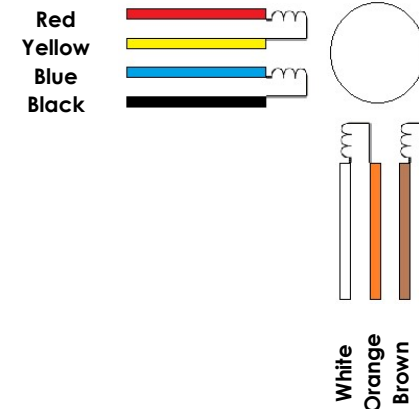

Connection Type	Parallel	Series	Unipolar
Holding Torque	3,5 Nm	3,5 Nm	2,2 Nm
Current	4,0 A	2,0 A	2,8 A
Resistance	$0,7 \pm 10\% \Omega$	$2,8 \pm 10\% \Omega$	$1,4 \pm 10\% \Omega$
Inductance	$3,9 \pm 20\%mH$	$15,6 \pm 20\%mH$	$3,9 \pm 20\%mH$

Dimensions (mm)

